

Wiring Diagram for TPR Phantom 20W and 40W RGB




Each fixture comes with outdoor rated DMX connectors on 1' tails In (Male) and Out (Female). They also come with a 4' whip for Power In (120/240VAC).



Phantom 20W RGB



Phantom 40W RGB

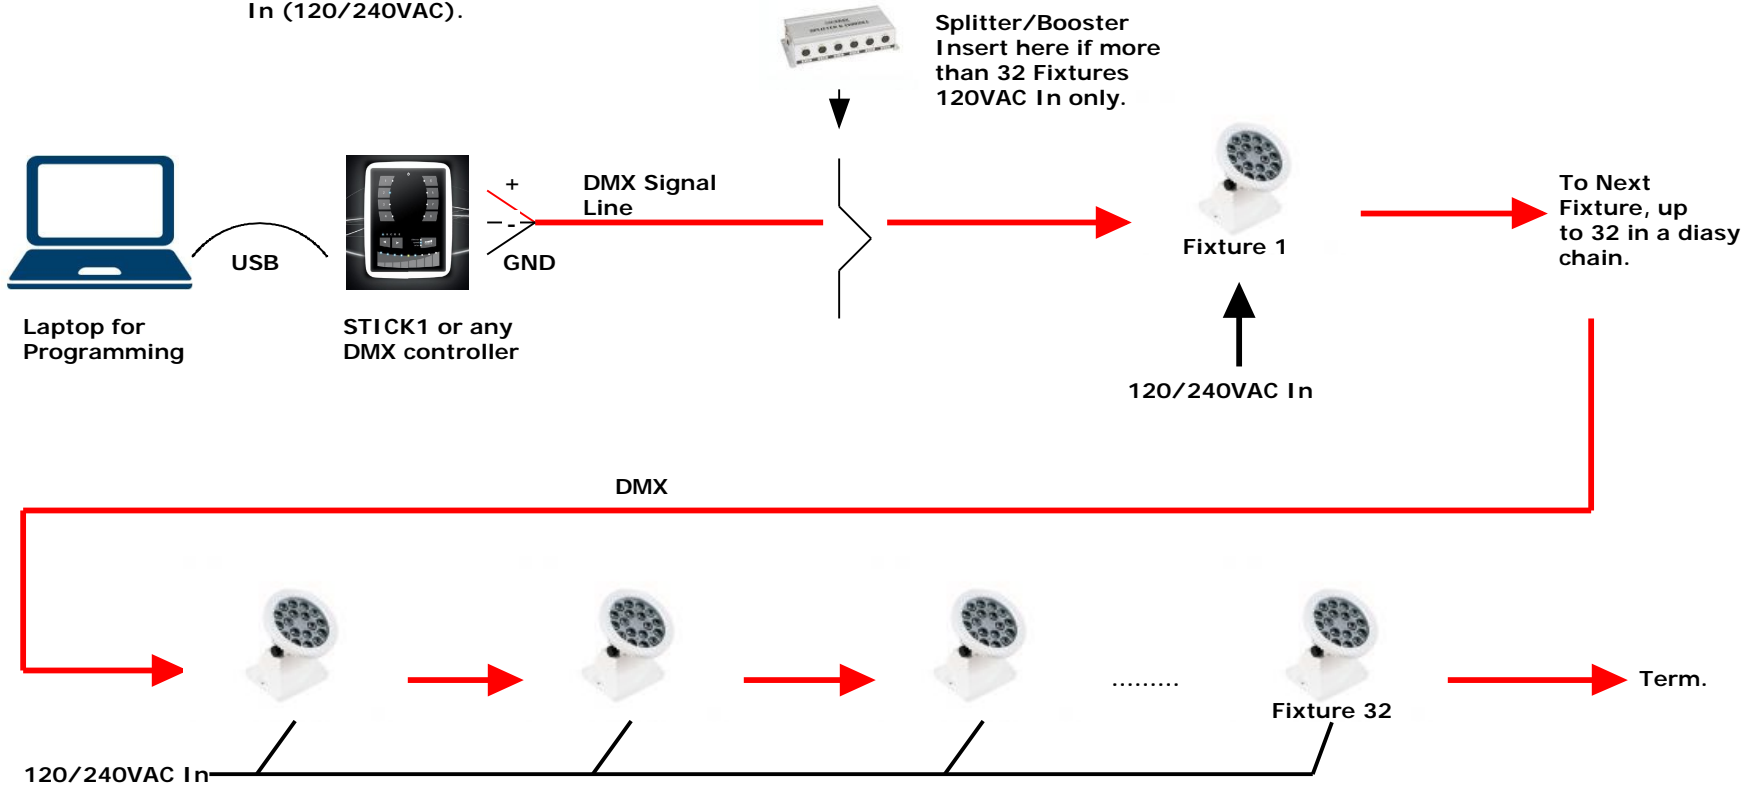

Notes: From the DMX Controller to the last fixture in line you can run 1000' and 32 fixtures. If you go above 32 fixtures you must use the Splitter Booster (120VAC only). The Splitter Booster has an input (from the controller) and 6 outputs. Each output can have 32 fixtures and up to 1000' to the last fixture. For runs of over 20 fixtures we recommend a DMX terminator plug at the end. Red line is DMX cable- AWG18/3 or AWG18/2 with a shielded braid. Belden 88770 or 3105.

Questions: TPR Enterprises
914-698-1141