


# TPR WESTFLEX SMD



## Specification Information: \*

- 2 watts/ linear foot
- 10' Maximum run length \*\*
- Cutable increments 2" (3 LED's)
- Approx 70% light output at 25,000 hrs
- 50,000+ Hrs expected life
- Dimmable
- Voltage: 12V DC
- LED Spacing: 18 LED's per foot
- Viewing angle: 120 Degree
- Turning radius: 1" along the vertical plane
- Available for Indoor/Outdoor(IP67)

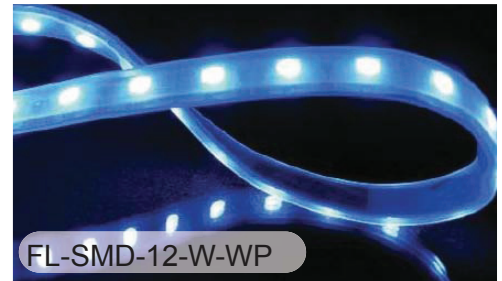

## Product Information:

Color Options	Approximate output for 18" section
CW (Cool White) ~4500k	82 lm/ft
WW (Warm White) ~3300k	72 lm/ft
Dimensions	0.225"h x 0.625"w w/ clip & connector
LED type	Single Color/ Surface Mounted Diode
Mounting	MS - 3M Self Adhesive (Usable with NP version Only) MC - Adhesive Mounting Clip MCIP - Screw Mounting Clip MT(B) - Aluminum Track Silver (or Black)
Shortest Segment	2" (3 LEDs)
Max Lead Length	35' with #20AWG
Shipping Lengths	20'-0" roll and field cut to length in 2" Increments Pre-cut to length by factory also available
Connection Methods	T0 - Field Soldered tail (Standard) TC - 19" clip-on lead T1 - 12" Factory installed lead (Standard) T_ - Factory installed lead cut to specify length
Listing & Standard	ETL Class 2 - UL 2108 (LV Lighting) IP67 on WP version
Warranty	Contact Factory for Warranty and Terms of Sale



\* Specifications subject to change without notice.

\*\*Note: For optimum uniformity, refer to factory for recommended run lengths.

TYPE	COLOR	RATING	MOUNTING	LENGTH	LEAD
FL-SMD	WW	WP	MT	10'	T1
FL-SMD	CW (Cool White) WW (Warm White)	IP - Indoor Protected NP - No Protection added	MC - Adhesive Mounting Clip MS - Self Adhesive (NP Only)	length in 2" Cut to	TC - 19.5" clip-on lead T0 - Field soldered tail (Standard)

