

TYPE:

## Features:

- Universal AC input / Full range (up to 240VAC)
- High Efficiency
- Built-in active PFC function
- For indoor installations ONLY
- OCP point adjustable through output cable or internal potential meter
- Suitable for LED lighting
- Cooling by free air convection
- 1 year warranty
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Compliance to worldwide safety regulations for lighting




## Specification Information: \*

Model	PS-36	PS-60
<b>OUTPUT</b>		
DC VOLTAGE	12v	12v
RATED CURRENT	3A	5A
RATED POWER	36w	60w
<b>INPUT</b>		
VOLTAGE RANGE	100-240VAC	100-240VAC
AC CURRENT	.8A/100VAC	1.3A/100VAC
SAFETY	UL / CE	UL / CE
DIMENSIONS (LxWxD)	4.29" x 1.76" x 1.21"	4.53" x 2.19" x 1.31"
COOLING	Convection	Convection
RATING & STANDARDS	UL1950	UL60950-1
OPERATING FULL-LOAD TEMP RANGE	0° ~+40°C	-0° ~+40°C


\* Specifications subject to change without notice.

## Typical Wiring Details:

- A. PS-36 or PS-60
- B. Optional - Westpower 300 (12v In-Line Dimmer)
- C. Optional - DMX-512 Signal from Console or Wall Control
- D. FL-SMD-2PIN-J
- E. FL-SMD-WW-WP
- F. FL-SMD-2PIN-C
- G. FL-SMD-MC-IP
- H. FL-SMD-MT-CLIP
- I. FL-SMD-MT

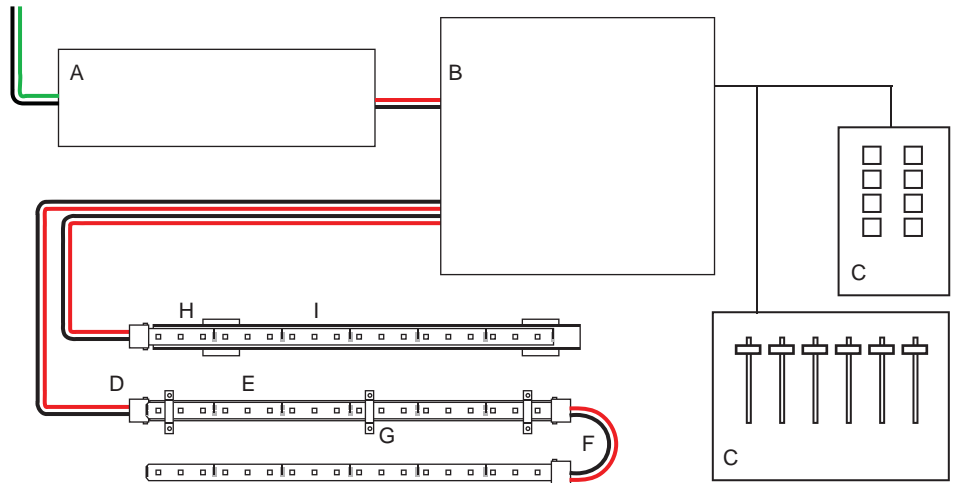

TYPE	WATTAGE
<b>PS</b> - <b>36</b>	
PS	36 Watt
	60 Watt



TPR ENTERPRISES, LTD.  
 644 Fayette Ave., Mamaroneck, NY 10543  
 Phone: (914) 698-1141 Fax: (914) 698-9419  
 E-mail: info@tprlights.com  
 Web: www.tprlights.com

Rev.9.10a

