


# TPR WESTFLEX SMD COVEMAX X



## Specification Information: \*

- 2 watts/ linear foot
- 12.5' Maximum run length \*\*
- Cuttable increments 2" (3 LED's)
- Approx 70% light output at 50,000 hrs
- 50,000+ Hrs expected life
- Dimmable
- Voltage: 12V DC
- LED Spacing: 18 LED's per foot
- Viewing angle: 120 Degree
- Turning radius: 1" along the vertical plane
- Available for Indoor/Outdoor(IP67)

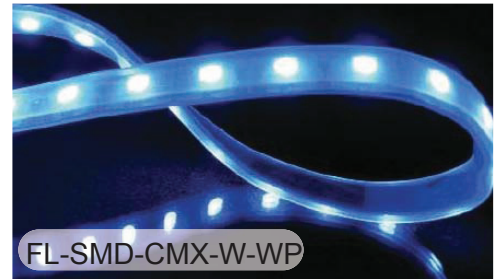

## Product Information:

Color Options	Lumen Output per Foot
2700K UWW (Ultra Warm White)	167lm
3300K WW (Warm White)	182lm
4500K CW (Cool White)	194lm
*Special Order- Contact Factory	
Dimensions	0.225"h x 0.625"w w/ clip & connector
LED type	Single Color/ Surface Mounted Diode
Mounting	MC - Adhesive Mounting Clip MCIP - Screw Mounting Clip MT(B) - Aluminum Track Silver (or Black)
Shortest Segment	2" (3 Lamps)
Max Lead Length	35' with #20AWG
Shipping Lengths	20'-0" roll and field cut to length in 2" Increments Pre-cut to length by factory also available
Connection Methods	T0 - Field Soldered tail (Standard) TC - 19" clip-on lead T1 - 12" Factory installed lead (Standard) T_ - Factory installed lead cut to specified length
Listing & Standard	ETL Class 2 - UL 2108 (LV Lighting) IP67 LM79/80
Warranty	Contact Factory for Warranty and Terms of Sale



\* Specifications subject to change without notice.

\*\*Note: For optimum uniformity, refer to factory for recommended run lengths.

## FL-SMD-CMXWWWPMT10'T1

TYPE	COLOR	RATING	MOUNTING	LENGTH	LEAD
FL-SMD-CMX	2700	WP	MT	10'	T1
FL-SMD-CMX	UWW (2700K) WW (3300K) CW (4500K)	NP - No Protection WP - *Weatherproof (IP67) ** Must specify tail length for IP67 rating	MC - Adhesive Mounting Clip MT - Aluminum Track Silver	Cut to Increments	T0 - Field Soldered tail (Standard) T1 - 12" Factory installed lead

