


# TPR LED 300° NEON RGB (20MM)

IP65

## Description:

The **TPR LED 300° Neon** is a flexible Neon replacement for Architectural and Entertainment venues. It is IP65 rated and has UV inhibitors. Great for outlining buildings and creating curved lines of light, it is an excellent choice for Marquees and large scale signage. This product is unique in its ability to broadcast light in 300 degrees. It also cuts to length every 2.46". We supply this product prefabricated and ready for installation with power feed and end cap installed.

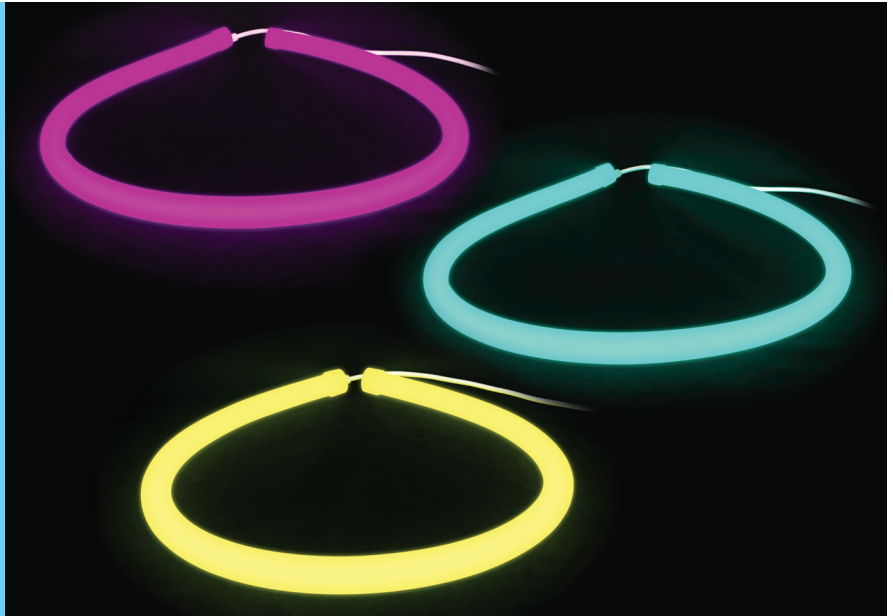

## Specifications: \*

|                    |                           |                 |                                  |
|--------------------|---------------------------|-----------------|----------------------------------|
| Construction:      | Silicone                  | Lamp Life:      | 50,000hr (70% Lumen Maintenance) |
| Power:             | 2W/ft                     | Cut length:     | Every 2.46"                      |
| Operating Voltage: | 24VDC                     | Max Run Length: | 16ft single feed only            |
| Operating Temp:    | -4F to 104F (-20C to 40C) | Binning:        | 3 step MacAdam ellipse           |
| Dimensions:        | 20mm Diameter             | Power Feed:     | 10' standard                     |

## Certifications:



## Ordering Logic:

| MODEL           | COLOR | LENGTH (in inches) |
|-----------------|-------|--------------------|
| TPR-FL-NEON-300 | RGB   |                    |

\* Specifications subject to change without notice.