


TPR LED NEON RGBW SIDE-BEND

IP67

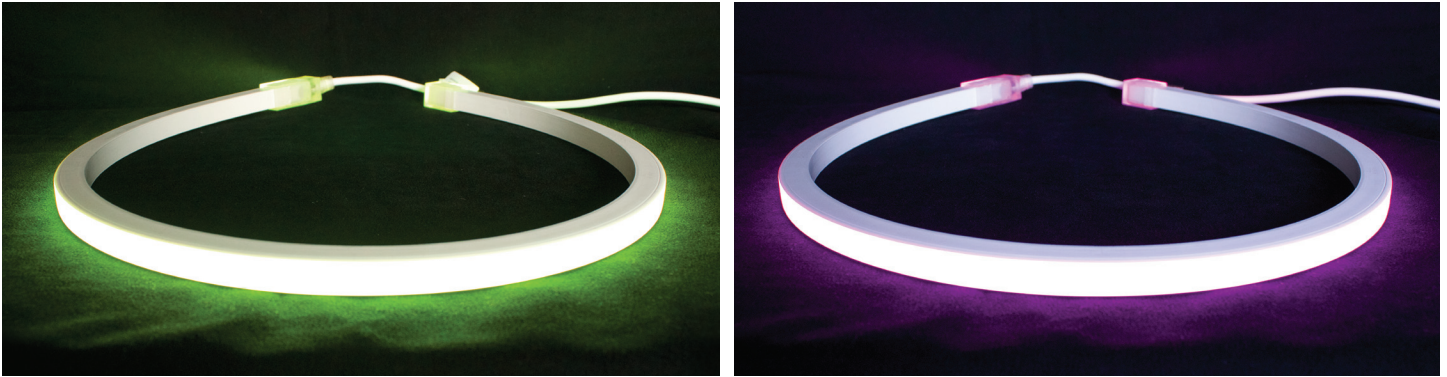

Description:

The **TPR LED Neon RGBW** is a flexible Neon replacement for Architectural and Entertainment venues. It is IP67 rated for extreme weather and uses DMX 512 for control. Great for outlining buildings and creating curved lines of light, this product also has UV inhibitors. It also cuts to length every 3.28" for custom length runs. This product is available in RGB-W (both 2700K and 4000K).

Note: *Our Side-bend LED Neon bends vertically (can be mounted on the side of a rounded surface).*

Specifications:*

Construction:	PVC Ivory White base	Lamp Life:	50,000hrs @ 70% Lumen Maintenance
Power:	4.6 W/ft	Max Run Length:	16.4' Single Feed Injection Molded Connectors
Operating Voltage:	24VDC	Cutting Increment:	83.33mm (3.28")
Operating Temp:	-4F to 104F (-20C to 40C)		
Dimensions:	22mm W x 23mm H (End Cap) 16mm W x 17mm H (Mid Fixture)		

Certifications:



Ordering Logic:

MODEL		COLORS		SHAPE/TYPE		FEED TYPE
TPR-FL-NEON-RGBW	-	4000K 2700K	-	SB (Side-Bend)	-	EF (End Feed) BF (Bottom Feed) SF (Side Feed)

* Specifications subject to change without notice.