


TPR Low Profile Extrusion

O-YD-1606

IP44

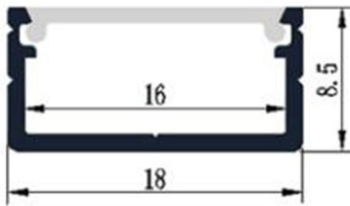

Description:

The TPR Westflex Low Profile Extrusion is an aluminum channel with polycarbonate lens accessory for the Westflex family of tape lights. The lens comes in Opalescent, Frosted and Clear versions for a multitude of applications, including Neon replacement and Linear lighting. The fixture comes up to 6' long and can be cut to length. With a low profile end cap these can be run end to end for a near seamless look.

Specifications:*

Construction: Aluminum channel, Polycarbonate lens
Lumen Output: See Westflex Tape lights
Operating Temp: -4F to 104F (-20C to 40C)
Dimensions: 18mm x 8.5mm

Ordering Logic:

MODEL	LENS	TAPE LIGHT	LENGTH (in inches)	LEAD (in inches)
TPR-EXT-LPF	F (Frosted) O (Opalescent) C (Clear)	SMD3200 (90lm/ft) SMD6500 (100lm/ft) CMX2700 (164lm/ft) CMX3300 (184lm/ft) DMX4500 (196lm/ft) TUNE (Tuneable White) 5.0 2700 (380lm/ft) 5.0 3300 (390lm/ft) 5.0 4500 (400lm/ft) SMDRGB 4IN1RGBW	Ex: 50"	Ex: 36"

* Specifications subject to change without notice.