
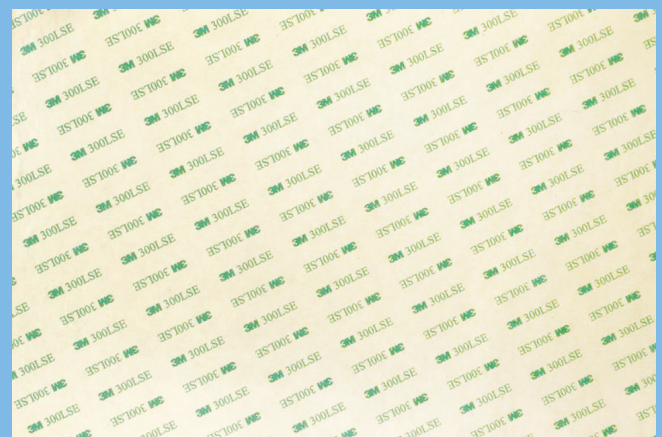


TPR MIRAGEFLEX™ – TUNABLE WHITE

IP20/54

Description:

The **TPR Mirage Flex™** Tunable White is extremely flexible, low profile and easy to install. It's field cuttable which makes it ideal for curved surfaces and applications where field modification is necessary. MirageFlex™ will provide even illumination with less than one inch of space between the light panel and the translucent material ie: stone, glass, polymer. Each sheet is provided with multiple quick connect points. This enables quick connection and feed through for multiple panels. There are multiple wattage and lumen packages available for even greater flexibility. Our Tunable White version allows for a range between 2700K-6500K color temperatures and CRI90 is standard. Our IP54 model has you covered for wet location applications.

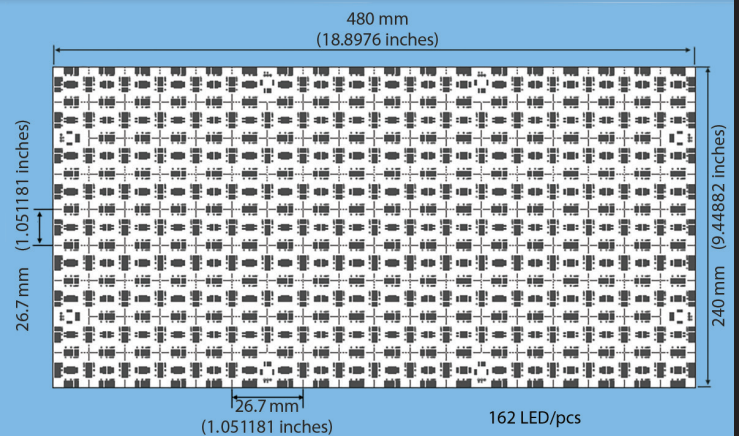

Specifications:

- Operating Voltage:** 24V DC (CV)
- Dimensions:** 9.45" x 18.9" (one size)
(240mm x 480mm) flex panel
- Operating Temperature:** -22 °F ~ +104 °F
 - Each panel is supplied with a jumper in 1" and 6" and a power feed in 4 ft.
- Color Temperatures:** 2700K – 6500K
- Wattage Options:** 11W and 16W per panel
1038 lumens (@ 11W), 1510 lumens (@ 16W) per panel
- Cutting Increments every:** 1.05"(26.7mm)L x 1.05"(26.7mm)W
 - Panel is .046" (1.35mm) thick without connector, .21" (6.25mm) with connector
- Color Rendering:** CRI 90+

Certifications:



Ordering Logic:

| MODEL | COLOR | WATTAGE (per panel) | IP RATING |
|----------|-------|---------------------|--------------|
| TPR-MFLP | TUNEW | 11 WATT 16 WATT | IP20 IP54 |