


TPR WESTFLEX® RGB ROUND-TOP LED NEON

IP68

Description:


The **TPR Westflex® RGB Round-top LED Neon** is a flexible Neon replacement product for use in Architectural and Entertainment venues. It is IP68 rated for extreme weather and has an extremely tight bend radius (horizontal bend). This product is great for outlining buildings and creating curved lines of light and uses DMX 512 for control.

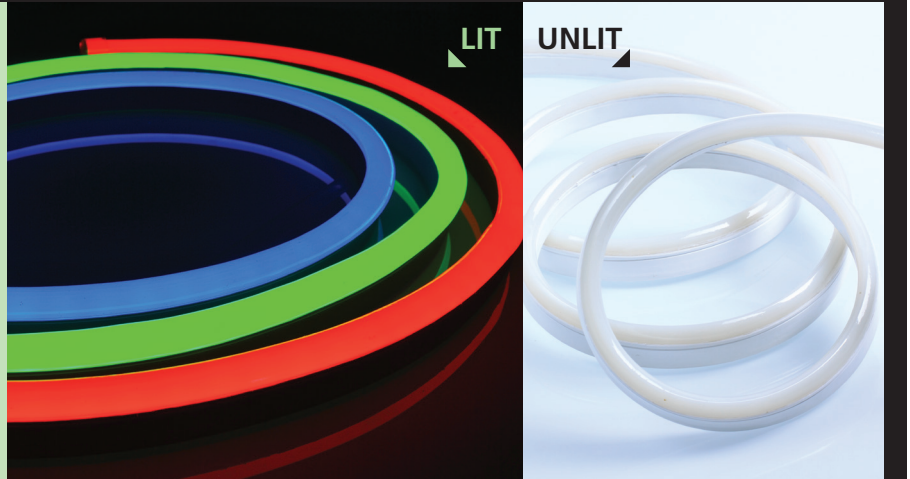

Specifications:

Power Consumption: 3.7Watts at Full RGB
Operating Voltage: 24VDC
Operating Temp: -4F to 104F (-20C to 40C)
Dimensions: 0.46"W x 0.82"H
Lamp Life: 50,000 Hours 70% Lumen Maintenance
Min Bend Radius: 4.75"
Min Segmentation: 100mm (3.9370")
Max Run Lengths: 21' Single Feed, 42' Double Feed
Lumens (by color):
RGB: 70 lumens per foot
RED: 18 lumens per foot
GREEN: 42 lumens per foot
BLUE: 9 lumens per foot


Mounting Clip



Certifications:



Mounting Track

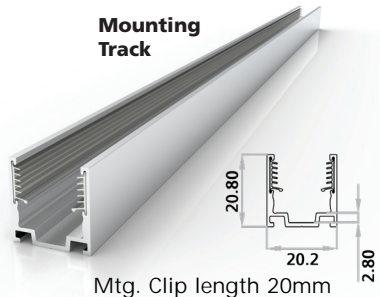

Ordering Logic:


MODEL	COLOR	TOP	FEED TYPE
TPR-FL-NEON	RGB	R (round-top)	EF (end feed) BF (bottom feed) SF-R (side feed, right side) SF-L (side feed, left side)

TPR Westflex® Round-top Neon End Dimensions

Dual Injection-molded Front Connector-End Feed



TPR-FL-NEON-FC1-10'-EF





Dimensions in mm

Dual Injection-molded Front Connector-Side Feed



TPR-FL-NEON-FC1-10'-SF Left




TPR-FL-NEON-FC1-10'-SF Right

Dual Injection-molded Front Connector-Bottom Feed




TPR-FL-NEON-FC1-10'-BF



Dual Injection-molded End Cap



TPR-FL-NEON-EC



- Note: 1. Unless otherwise stated, the tolerance of the connector is $\pm 0.5\text{mm}$;
 2. To avoid damage from the excessive force on cable joint, please keep at least 60mm of cable ahead in the natural state.
 3. All Front Connectors will be made with a 10' tail.