


# TPR COVEMAX® 3.0-V2

IP67




## Description:

The **Covemax® 3.0-V2** is a flexible 24VDC tape light for Architectural and Entertainment use. It is available in Non-Protected, Indoor Protected and IP67 Rated Weatherproof jackets. The Covemax® 3.0-V2 is cuttable every 62.5mm (2.46") and there are a range of mounting options. In addition there are an assortment of Extrusions available for this product. It is available in 4 color temperatures shown below.

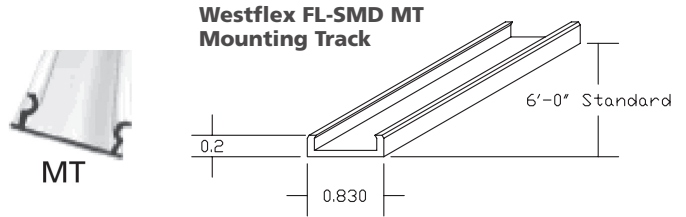

Westflex FL-SMD-WP-MC-IP Mounting Clip



## Specifications:

- 2.5W/ft
- 70% Light Maintenance at 50,000hrs
- Ambient Temp of -4F to 122F
- 24VDC
- Dimmable/Controllable
- 40 LED's per foot
- 430lm/ft
- 120 Degree Viewing Angle
- Max Lead length 35' with AWG20/2
- 3 Step MacAdam Ellipse CRI80

## Certifications:



## Ordering Logic:

MODEL	RATING	COLOR TEMP (K)	MOUNTING	LENGTH (inches)
TPR-FL-CMX3.0-V2	<ul style="list-style-type: none"> <li>NP (No Protection)</li> <li>IP (Indoor Protection)</li> <li>WP (IP67)</li> </ul>	<ul style="list-style-type: none"> <li>2700</li> <li>3000</li> <li>4000</li> <li>5000</li> </ul>	<ul style="list-style-type: none"> <li>MC (Adhesive Clip)</li> <li>MCIP (Screw Down Clip)</li> <li>MT (Mounting Track)</li> </ul>	

Example: **TPR-FL-CMX3.0-V2-WP-3000-MT-96"**  
Covemax X 3.0-V2, Weatherproof, 3000K, with Mounting Track, 96" fixture.