


# TPR WESTFLEX® 120V FLAT-TOP HORIZONTAL & VERTICAL LED NEON

IP67

## Description:

The **TPR Westflex® 120V flat-top LED Neon** is a flexible Neon replacement product for use in Architectural and Entertainment venues. It is available in several single color temperatures of white light and solid colors. It is IP67 rated, has UV protection, and allows for a tight bend radius. Great for outlining buildings and creating curved lines of light. Does not require an external driver.

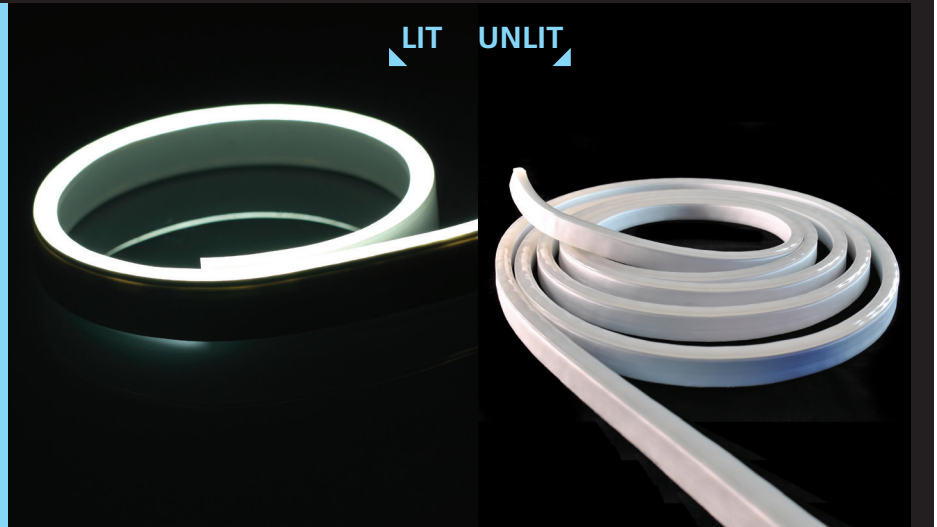

## Specifications:

Working Temp.:	-20 ~ 35C° / -4~95F°	Min. Segment Length:	3.28078" (83.33mm - for all colors except Red and Amber) 4.9213" (125 mm - Red and Amber ONLY)
Storage Temp.:	-20 ~ 60C° / -4~140F°	Ambient Installation Temp.:	0 ~ 45C° / 32~113F°
Voltage:	120VAC	Max. Mounting Surface Temp.:	60C° / 140F°
Lumens/FT (4000K white):	128 lumens per foot	Power Consumption:	3.1 watts per foot
Minimum Bend Radius:	4.72" (120mm)	Max. Fixture Length:	65.61' ( 20m) single feed

## Certifications:



## Ordering Logic:

MODEL	VOLTAGE	COLOR	BEND	FEED TYPE
TPR-FL-NEON-F	120V	RED GREEN BLUE AMBER PINK* 2200K 2700K 3000K 3500K 4000K 5700K	HB (horizontal bend) VB (vertical bend)	EF (end feed) BF (bottom feed) SF-L (side fed left) SF-R (side fed right)

\*Special order. Contact factory.