

TPR WESTFLEX® OPTIPRO™ 24V TAPELIGHT



IP67

Description:

The **Westflex® OptiPro™ Tape Light** is a flexible 24 volt DC product for architectural and entertainment applications. The Westflex® OptiPro is IP67 rated for outdoor applications. The product is cuttable every six LED's (4.9213") and has an incredible maximum run length of 32' with a feed from one end.

This flexible product gives you the optic control and performance of a much larger rigid fixture, with the advantages of flexibility, easy installation and cost effectiveness.

The many color temperatures, CRI and beam spreads make it the ideal choice for various projects/applications.

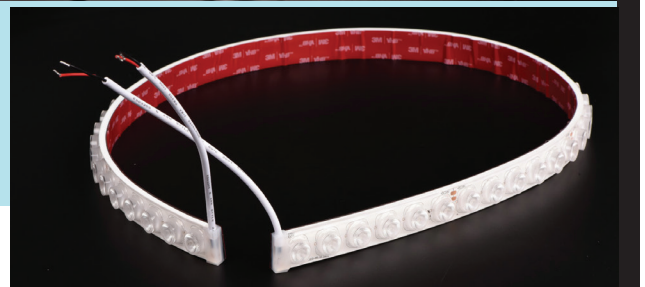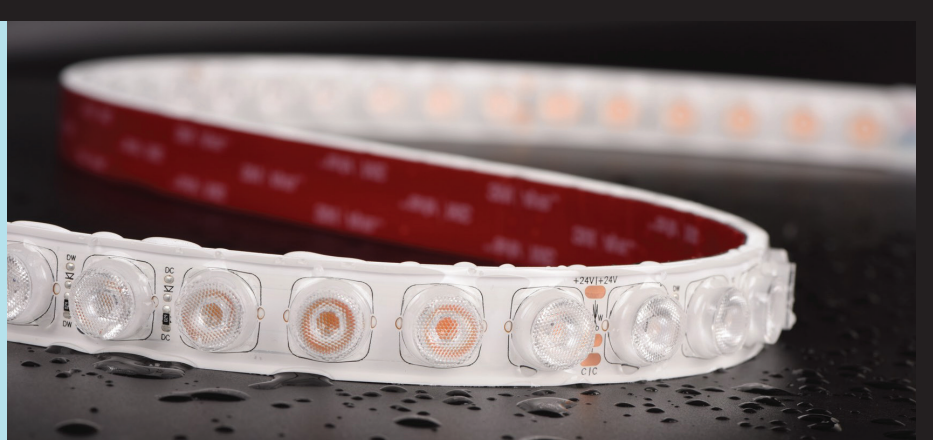

Specifications:

Power: 6.1W/ft
PCB Width: 0.8661" (22mm)
Lumen Output: 500Lm/ft CRI 90+ (4000K)

MAX. Run Length: 32'
Cut Length: 4.9213" or 125mm (6 LEDs)
Voltage: 24 VDC

CCT: 2700K, 3000K, 4000K Standard
Dimmable: Yes (PWM, DALI, 0/1-10V, Triac)
IP Rating: IP67


Operating Temp.: -35°C ~ 50°C
Beam Angle: 20°, 30°, 45°, 60°, 20 x 45°
Lumen Maintenance: 50,000 Hrs




Certifications:



Westflex FL-SMD MT Mounting Track

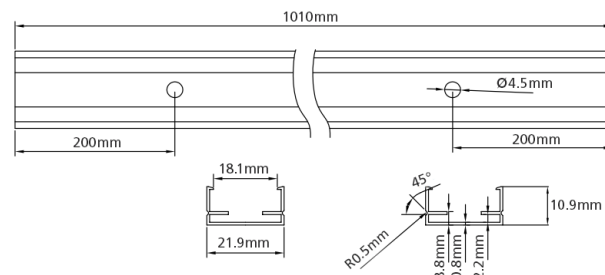

Westflex FL-SMD-WP-MC-IP Mounting Clip



Ordering Logic:

MODEL	BEAM ANGLE	COLOR TEMP	CRI
TPR-FL-SMD - OPTIPRO24V	20°	*1800K 4000K	*80+
	30°	*2200K *4500K	90+
	45°	*2400K *5000K	*95+
	60°	2700K *5700K	*98+*
	20x45°	3000K *6000K	
		*3500K *6500K	

Special order color temps and CRI must meet minimum order qty.