


# TPR MIRAGE FLEX™ RGBW PANEL

IP20/54

## Description:

The **TPR Mirage Flex™ RGBW** panel is extremely flexible, low profile and easy to install. It's field cuttable which makes it ideal for curved surfaces and applications where field modification is necessary. MirageFlex™ will provide even illumination with less than one inch of space between the light panel and the translucent material ie: stone, glass, polymer. Each sheet is provided with multiple quick connect points. This enables quick connection and feed through for multiple panels. Our IP54 model has you covered for wet location applications.

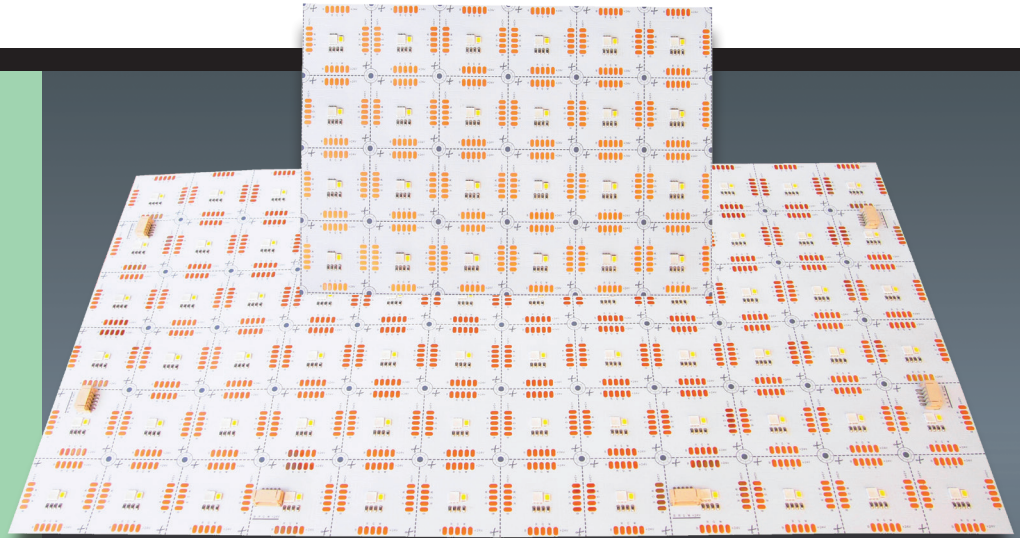

## Specifications:

**Voltage:** 24V DC (CV)  
**Power Consumption:** 25 watts per panel (@ full RGBW)  
**Dimensions:** 480mm x 240mm (18.90" x 9.45")  
**Segmentation:** Cutting increments every:  
 1.05" (26.7mm) L x 1.05" (26.7mm) W  
**Control:** DMX

### Non-White Colors in Nanometers:

**RED:** 620-630nm  
**GREEN:** 520-525nm  
**BLUE:** 460-470nm

### Lumens (by color):

**RED:** 120 lumens  
**GREEN:** 360 lumens  
**BLUE:** 90 lumens  
**2700K:** 850 lumens  
**4000K:** 900 lumens  
**6000K:** 900 lumens

## Certifications:



## Ordering Logic:

MODEL	WATTS (per panel)	COLOR TEMP	RATING
TPR-MFLP-RGBW	25W	2700K 4000K 6000K	IP20 IP54