

TPR WESTFLEX® HORIZONTAL BEND OR VERTICAL BEND SLIMLINE LED NEON

IP68

Description:

The **TPR Westflex® LED Neon** is a flexible Neon replacement product for use in Architectural and Entertainment venues. It is available in several color temperatures of white and solid colors. It is IP68 rated for exterior applications and has an extremely tight bend radius. This product is great for outlining buildings and creation curved lines of light, especially in tight spaces.




Specifications:

Working Temp:	-20 ~ 35°C / -4 ~ 95°F
Storage Temp:	-20 ~ 60°C / -4 ~ 140°F
Voltage:	24V DC (CC)
Lumens/FT (4000K white):	52 lumens per foot
Dimming:	DMX or 0-10V
Min. Segment Length:	3.28078" (83.33mm – for all single colors)
Ambient Installation temp:	0 ~ 45°C / 32 ~ 113°F
Max Mounting Surface Temp:	60°C / 140°F
Power Consumption:	1.4 watts per foot
Max Fixture Length:	32.8ft (10m)
Fixture Width & Height:	0.3937" x 0.3937" (10mm x 10mm)


Horizontal Bend

Dual Injection-molded Connector

Vertical Bend

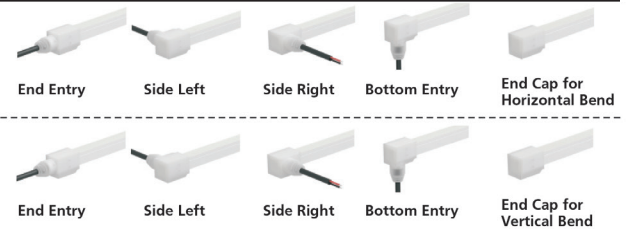


Dimensions: mm



Certifications:




Vertical Bend

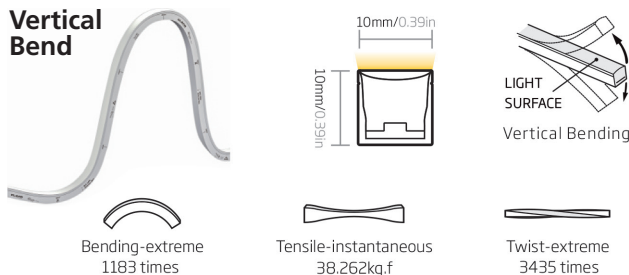

Warning: Extreme Destructive Tests in laboratory only, and it's forbidden to operate in practice.

Horizontal Bend

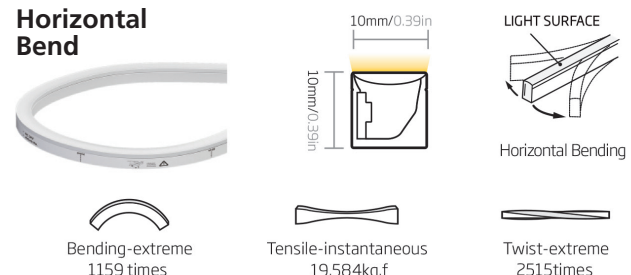

Warning: Extreme Destructive Tests in laboratory only, and it's forbidden to operate in practice.

Ordering Logic:

MODEL	COLOR or CT	BEND TYPE	FEED TYPE
TPR-FL-NEON-SL	RED GREEN BLUE AMBER	2200K 2700K 3000K 3500K 4000K 5700K	HB (Horizontal) VB (Vertical)
			EF (End Feed) BF (Bottom Feed) SF-L (Sidefeed L) SF-R (Sidefeed R)

Mounting Track

