

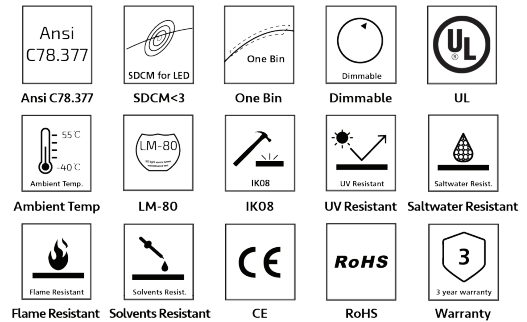
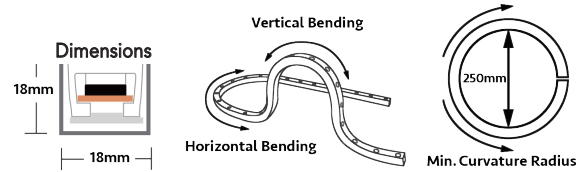



TPR KurveFlex™ Flexible LED Wall Grazer

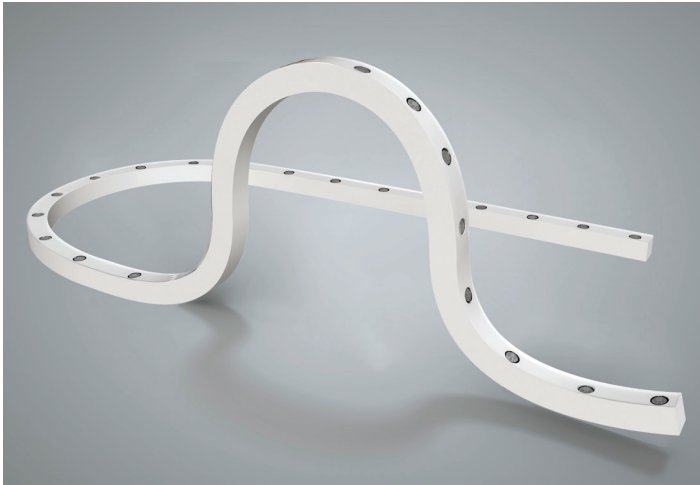

Optional LENS Distribution

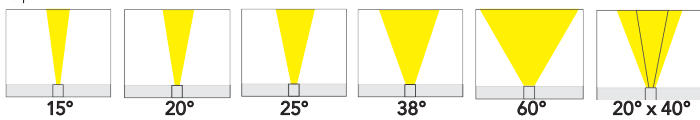

Optional Cover:




Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	18W/m
Physical	
LED Count	24 LEDs/m (7 per ft.)
Cutting Unit	6 LEDs (9.8")
Cutting Unit Length	250mm (9.8")
Mini. Curvature Radius:	250mm (9.8")
Output	
LED Light	Epistar SMD LED 3535
CRI	>80
Max Length	5 M (16ft.)
Optional Lens	15°, 20°, 25°, 38°, 60°, 20°x40°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Lumens per ft	25° 3000K 365 lumens
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	3 Years Warranty
IP Rating	IP68

Optional Color	
	2700K(2725±145K)
	3000K(3045±175K)
	3500K(3465±245K)
	4000K(3985±275K)
	5000K(5029±283K)
	Green(520-530nm)
	Blue (455-465nm)

TPR KurveFlex™ Flexible LED Wall Grazer

Beam Spreads

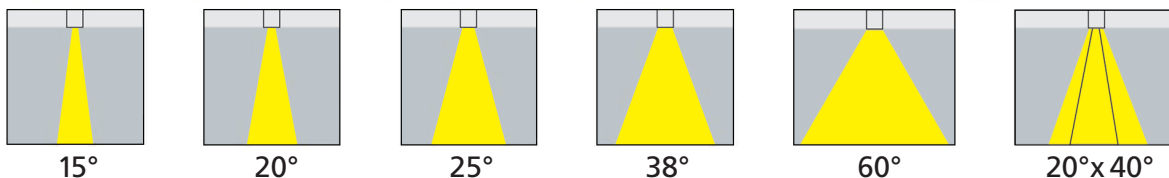

Ordering Code

TPR-KFLWG - - 3000K - E - 15 - A

Product No. _____

Quantity of Units (increments of six units) _____

CCT & Color _____

2700K, 3000K, 3500K, 4000K, 5000K, Green, Blue

Feed Type _____

(E) End (B) Bottom

Lens Distribution _____

15°, 20°, 25°, 38°, 60°, 20°x40°

Cover Styles _____


A=Standard B=Honeycomb

Mounting Options

Aluminum Mounting Channel




TPR-KFLWG-MT




Dimensions
Unit: mm

Aluminum Mounting Channel
with Wire Raceway

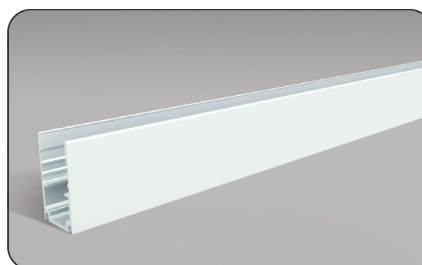

TPR-KFLWG-MTWR




Dimensions
Unit: mm


Mounting Options continued on next page.

Mounting Options (continued)

Flexible Aluminum Mounting Channel

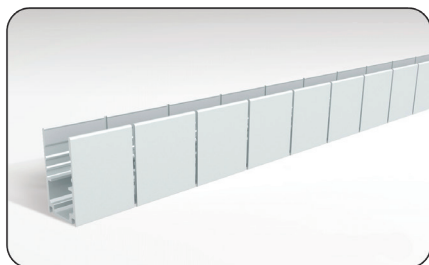

TPR-KFLWG-MTF




Dimensions
Unit: mm

Mounting Clip



TPR-KFLWG-MC





Dimensions
Unit: mm

Angle Adjustable Bracket




TPR-KFLWG-AB





Dimensions
Unit: mm

Feed Options: Molded Injection Connectors (IP68 Factory Assembly Only)

End Entry Connector

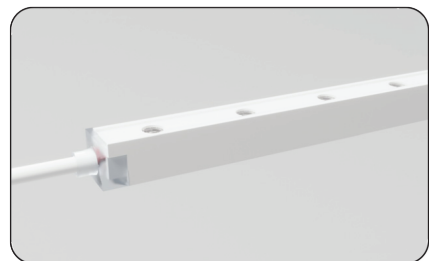

TPR-KFLWG-EC

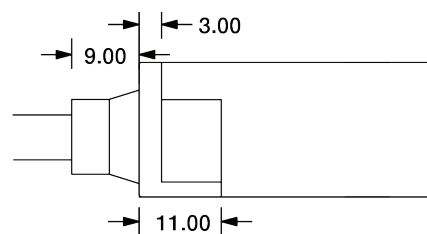



Dimensions
Unit: mm

Bottom Entry Connector




TPR-KFLWG-BC

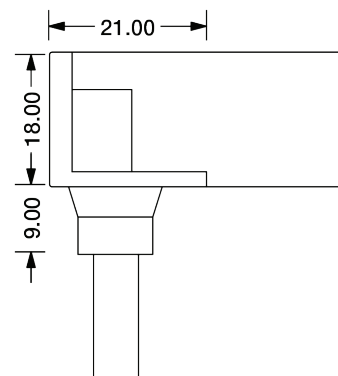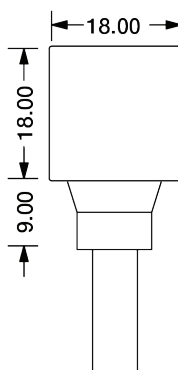

TPR KurveFlex™ Flexible LED Wall Grazer

Typical Wiring and Control Options

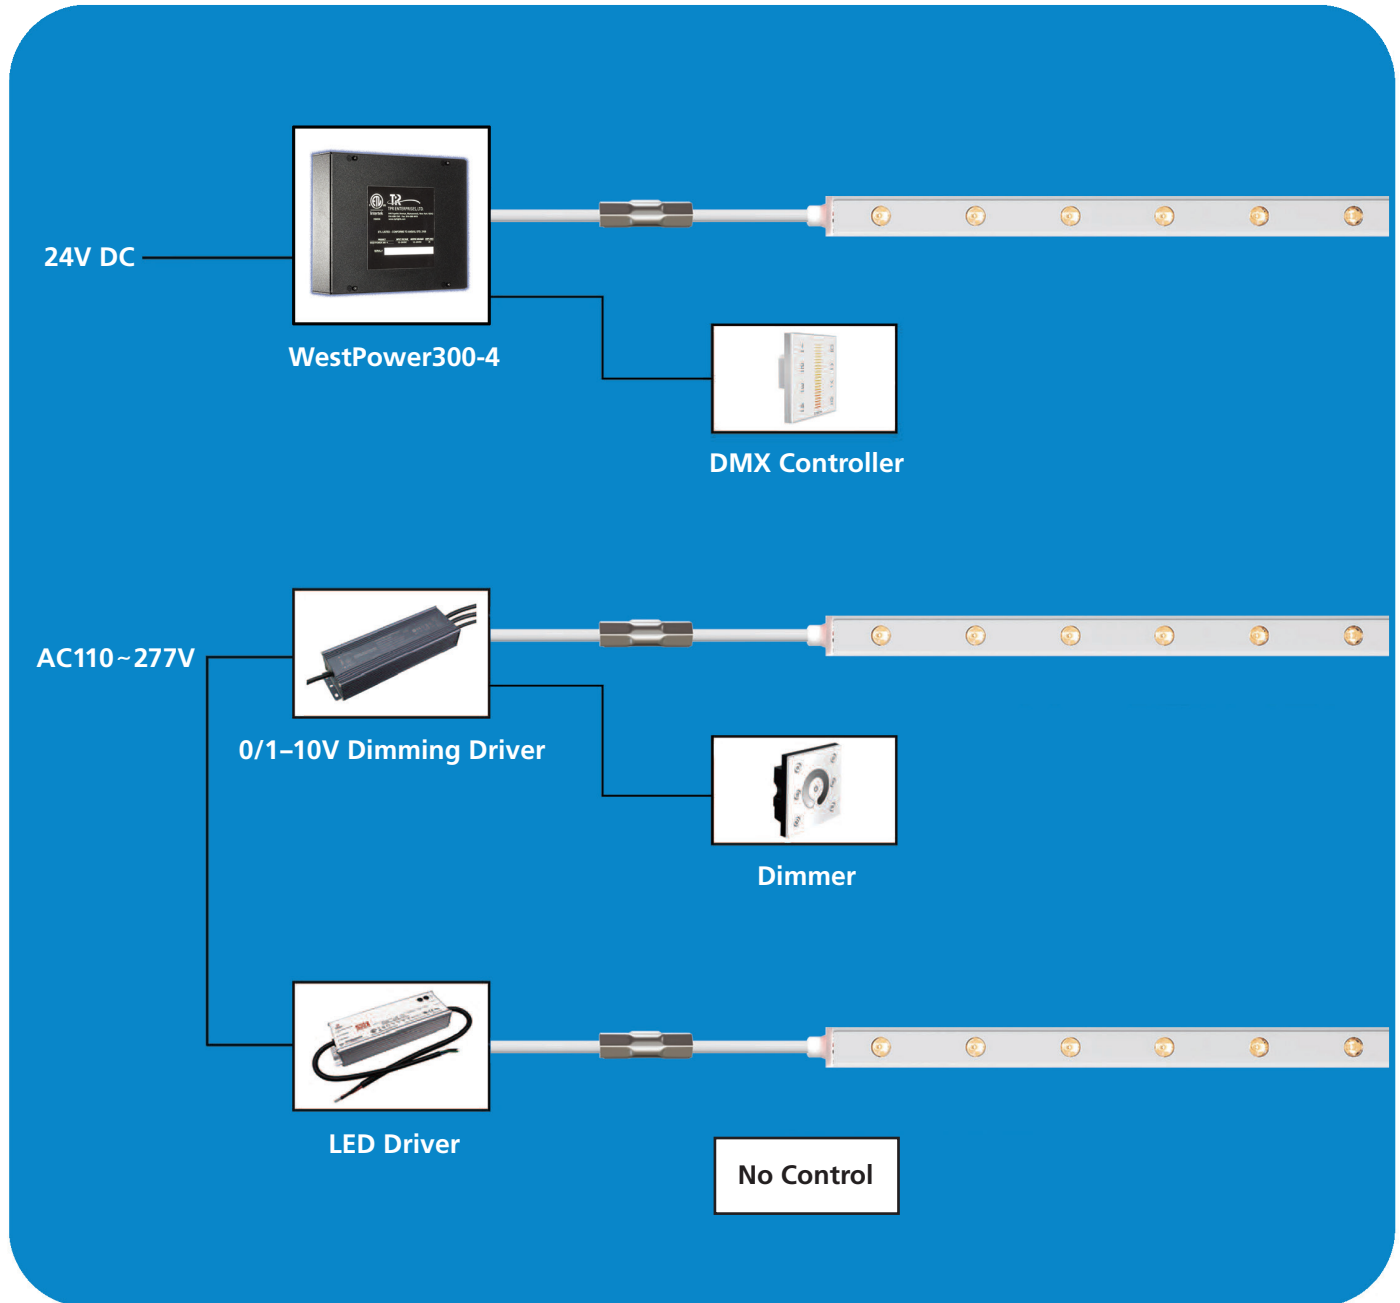

Accessories

TPR-KFLWG-MC – Mounting Clip

TPR-KFLWG-AB – Adjustable Bracket

TPR-KFLWG-MT – Aluminum Mounting Channel,
1 meter

TPR-KFLWG-MTWR – Aluminum Mounting Channel
with Wire Raceway, 1 meter

TPR-KFLWG-MTF – Flexible Mounting Channel