

TPR ENCORE FLAT-TOP LED NEON

IP67

Description:


The **TPR Encore LED Neon** is a flexible Neon replacement product for use in Architectural and Entertainment venues. It's available in several color temperatures of white, solid colors, RGB, and RGBW. It's IP67 rated, has UV protection, and allows for a tight bend radius. Great for outlining buildings and creating curved lines of light.




Specifications:

| | |
|---------------------------|---|
| Construction: | Silicone |
| Power: | 4.9W/FT (Single color), 4.6W/FT (RGB) 4.6W/FT (RGBW) |
| Operating Voltage: | 24VDC |
| Operating Temp: | -4F to 104F (-20C to 40C) |
| Min Bend Radius: | 5.91" |
| Lamp Life: | 50,000hr (70% Lumen Maintenance) |
| Max Run Length: | 39' Single Fed (Single Color only) |
| Max Run Length: | 16.4' Single Fed (RGB & RGBW only) |
| Connectors: | Molded (IP67) |
| Cut Length: | 2" (50mm) White Light 2.5" (62.5mm) RGB & RGBW |


Aluminum Mounting Track (Rigid)

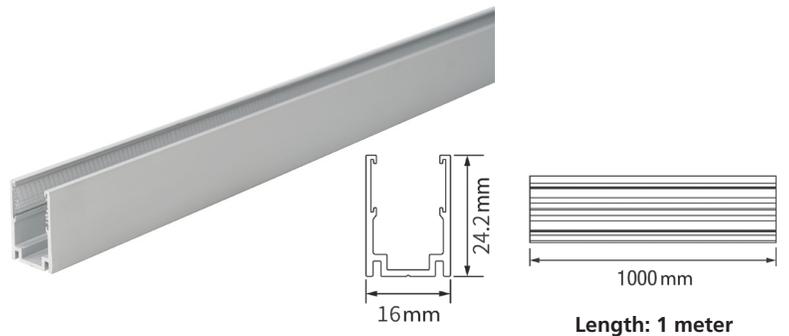

Aluminum Mounting Clip

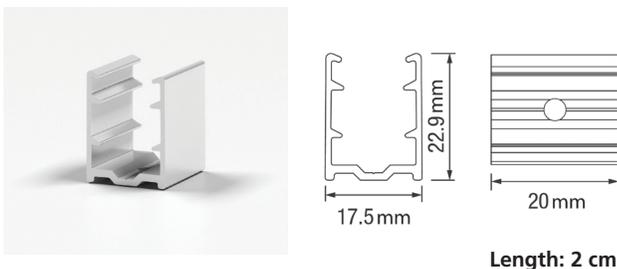


Aluminum Mounting Track (Flexible)

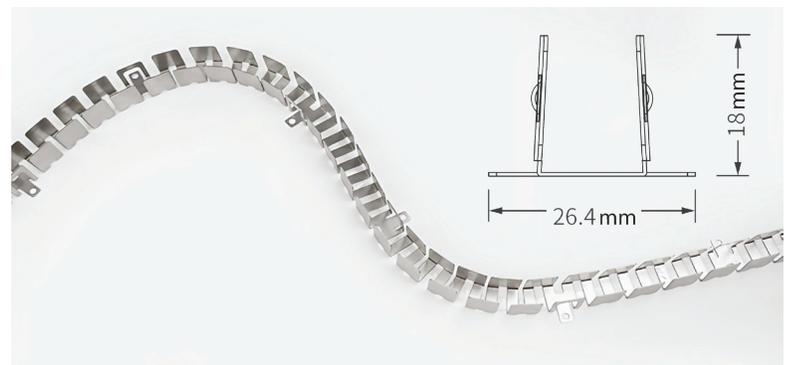

TPR ENCORE FLAT-TOP LED NEON CONTINUED

IP67

End Cap

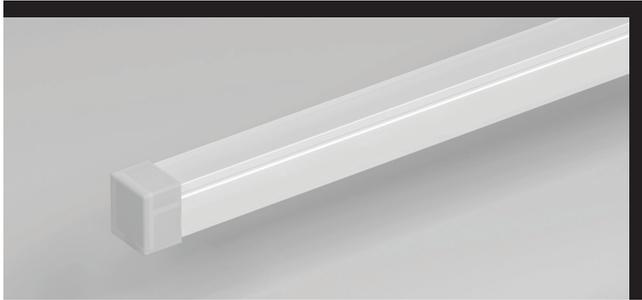



EF – End Feed



BF – Bottom Feed



SF – (Right or Left) Side Feed

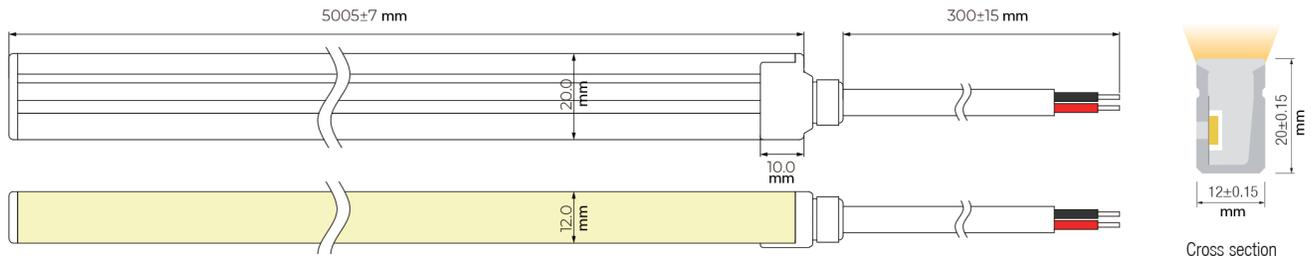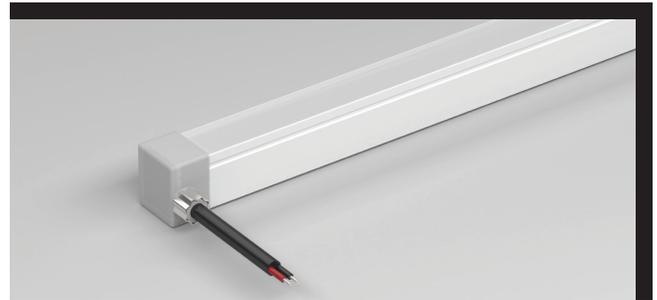

Certifications:



Ordering Logic:

| MODEL | COLOR OR | COLOR TEMP | FEED TYPE |
|-------------------------|---|--|---|
| TPR-FL-ENCORE - S - F - | W (Choose CT) R (Red) G (Green) B (Blue) A (Amber) P (Pink) RGB RGBW | 2200K 2500K 3000K 3500K 4000K 5000K 5700K 6500K | EF (end feed) BF (bottom feed) SF-L/R (side feed left or right) |