


TPR KLARITY™ SINGLE COLOR WHITE LINEAR

IP20


Description:

The **TPR White Light Klarity™ Linear** fixture is low profile, manufactured of extruded aluminum with a polycarbonate cover. This fixture is ideal for architectural and entertainment applications. The TPR Klarity features a versatile 120-277 VAC input. This fixture is supplied with a 150° swivel mounting bracket for precise focusing. Ideal for coves and other applications where space is limited and smooth high lumen output is required.

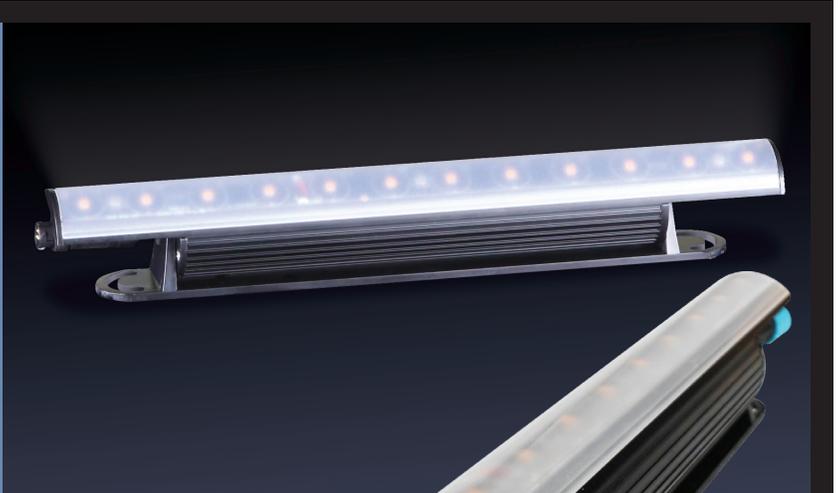

Specifications:

Construction: Aluminum Housing, Polycarbonate
Lumen Output: 1' fixture (in 3000K) 770 lumens
Beam Angles: 15°, 25°, 35°, 20° x 40°, 120°
Operating Temp: -4F to 104F (-20C to 40C)
Dimensions: 1.6" W x 1.77" H (on feet) x 12" L
Power: 8 Watts
LEDs: Cree XPG
Voltage: 120-277VAC
Rating: IP20
Control: DMX/RDM, or 0-10
Certifications: ETL, CE, ROHS
Rotation: 150°
Max Run Length: At 120V input, can connect
 Max. 75pcs 1ft. in one string*
 At 277V input, can connect
 Max. 128pcs 1ft. in one string*
 *DMX max 35 fixtures

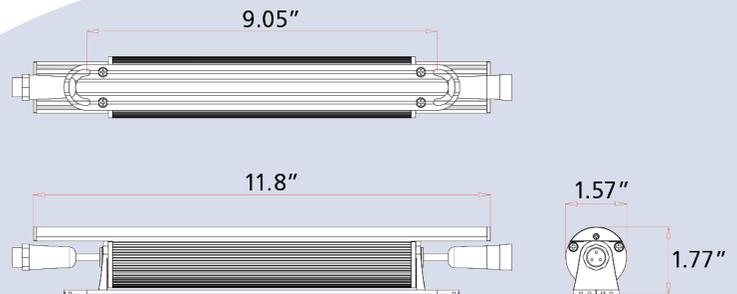

Accessories:

Part # **Jumper Power + Data**
 KLARJUMP1.5 1.5 ft. Cable
 KLARJUMP3 3 ft. Cable
 KLARJUMP6 6 ft. Cable
 KLARJUMP10 10 ft. Cable

Part # **Power + Data Feed Cable**
 KLARPWR10 10 ft. Cable – Bare Ends
 KLART T-Adapter for DMX Re-Feed



Ordering Logic:

MODEL	LENGTH (in feet)	COLOR TEMP	BEAM ANGLE	OPTIONS	CONTROL
TPR-KLA	1' 2' 4'	2700K 3000K 4000K	15° 25° 35° 20° x 40° 120°	BH (Black Housing) WH (White Housing)	DMX/RDM 0-10