


TPR WESTPOWER® MINI DC DIMMER DMX512/RDM – 4 CHANNEL

Features:

- 4 Channel DMX LED Dimmer Pack
- 8 Amps/Channel (25 Amps maximum/pack)
- ETL Listed US/Canada
- 3 Year Warranty
- DMX Indicator
- Operated at 12VDC–24VDC
- No ventilation required
- DMX Input/Output RJ45 or Terminal
- Short Circuit Protection
- Overtemperature Cut Off
- Overload Protection

Specifications:



MODEL	WESTPOWER® MINI
POWER*/CONTROL	*From TPR DC Power Supply
RATED POWER	300w/12v or 600w/24v
VOLTAGE RANGE	12-24VDC (See PS literature)
RATED CURRENT	8A/Channel 25A maximum/Pack
EXTERNAL DMX INPUT	RJ45 or Terminal
WIRING INPUT/OUTPUT MOUNTING	Screw Terminal (4) #6 Keyholes on back of unit Left/Right of chassis
DIMENSIONS (LxWxD) Unit only	5.5" x 2.0" x 1.0" (140 x 50 x 26mm)
DIMENSIONS (LxWxD) Chassis	7.5" x 8.5" x 2" (190.5 x 215.9 x 50.8mm)
WEIGHT	8.5 oz
MATERIAL/FINISH	Steel/Powder Coat Black
RATING & STANDARDS	ETL US/C
OPERATING TEMP RANGE	Designed for indoor usage -20°~122°F or -28°~50°C w/5-95% non-condensing humidity

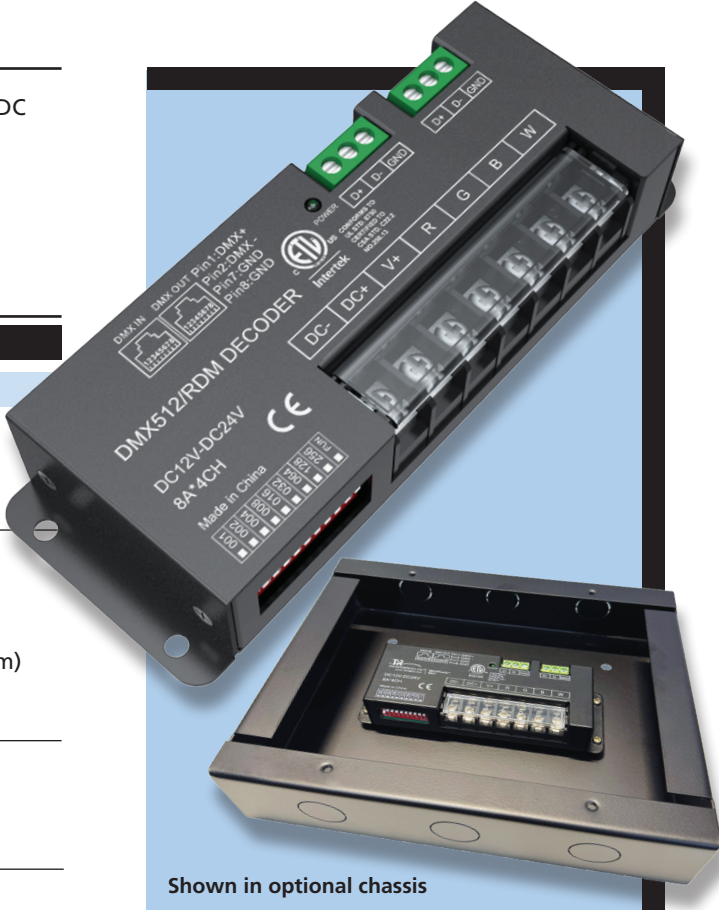

Shown in optional chassis

Typical Wiring Details:

- A. PS-## / PS-##-EC / -##-WP
See TPR power supply white sheets for more information
- B. WestPower® Mini (12/24VDC In-line Dimmer)
- C. Optional – DMX-512 Signal from Console, Wall Control or Other
- D. Power Input Wire
- E. TRR LED Product
- F. FL-SMD-MC-IP Mounting Clip
- G. FL-SMD-MT-CLIP Mounting Track Clip
- H. FL-SMD-MT Mounting Track

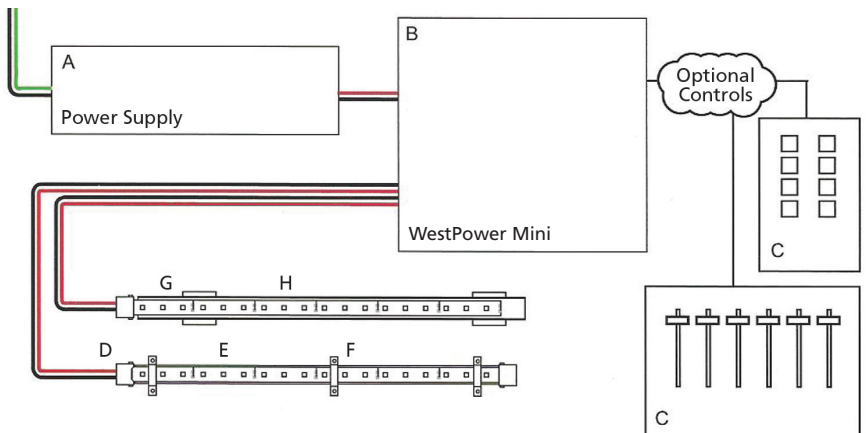

Ordering Logic:

DEVICE	MODEL	ACCESSORIES
WP-West	- Mini	- RJ45-FM3PXL (RJ45 to XLR Adapter) RJ45-M3PXL (RJ45 to XLR Adapter) Metal Chassis



Specifications are subject to change without notice.