
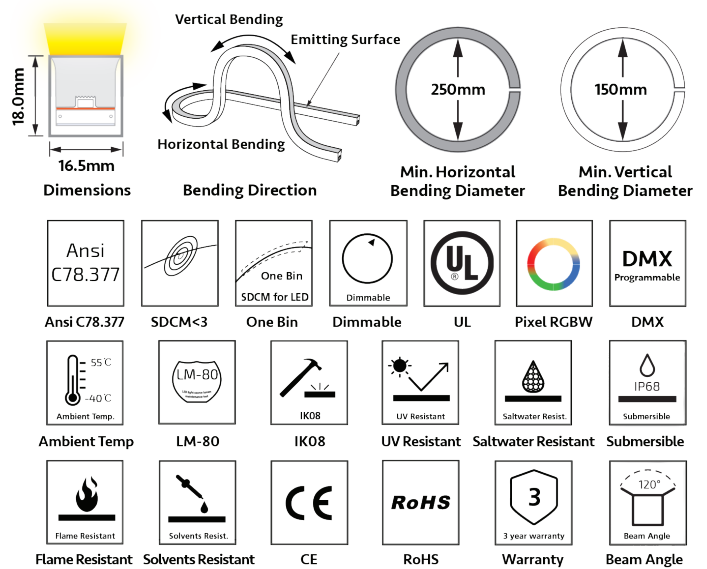


TPR KurveFlex™ DV DMX Pixel Chasing RGBW 3D Bend Direct View

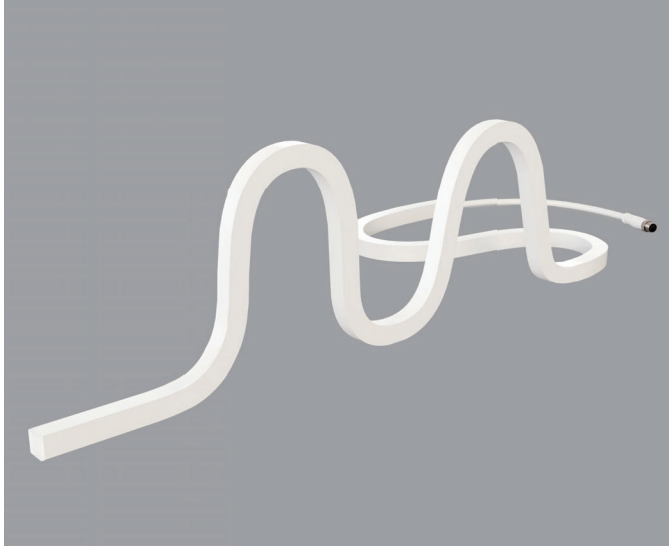


Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	20W/m
Physical	
LED Count	24 LEDs/m (7 per ft. approx.)
Cutting Unit	6 LEDs (9.8")
Cutting Unit Length	250mm (9.8")
Minimum Bend Diameter	250mm (Horizontal)/150mm (Vertical)
Output	
LED Light	Epistar SMD LED 5050
Max Length	7Mtrs. (22.98')
Beam Angle	120°
Lumen Maintenance	70,000 Hours 1.70 @ 25°C 50,000 Hours 1.70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	3 Years Warranty
IP Rating	IP68

Emitting Color		Lumen Output
	Red	60lm/m
	Green	192m/m
	Blue	36lm/m
	RGBW(White)	470lm/m
	3000K	216lm/m

Illuminance Distribution

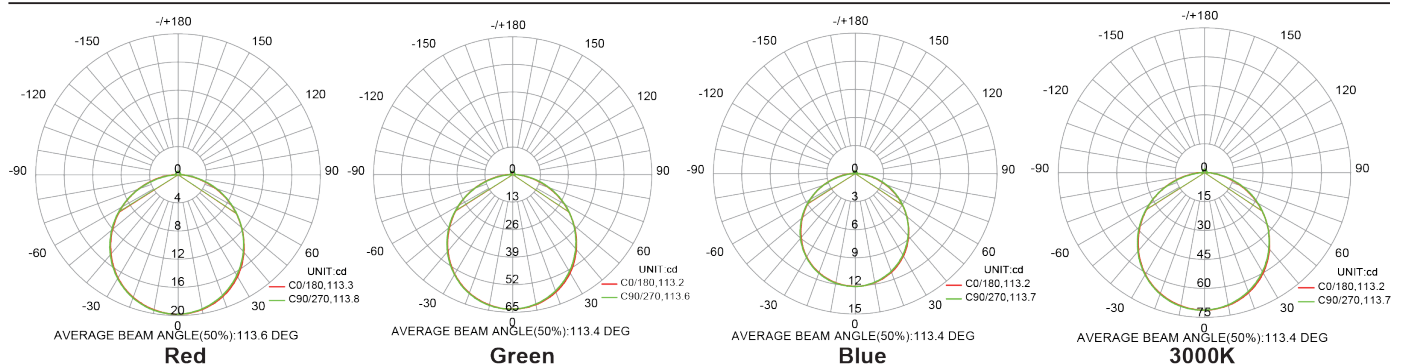

TPR KurveFlex™ DV DMX Pixel Chasing RGBW 3D Bend Direct View

Ordering Code

TPR-KFLDVPC-RGBW-3D - - 3000K - E

Product No. _____

Length 9.8" increments _____


CCT & Color _____

Feed Type _____


(E) End (B) Bottom (S) Side – Specify Left or Right

TPR KurveFlex DV DMX Pixel Chasing Mounting Track


1. Aluminum Flexible Mounting Track



Installation




Surface Mounted

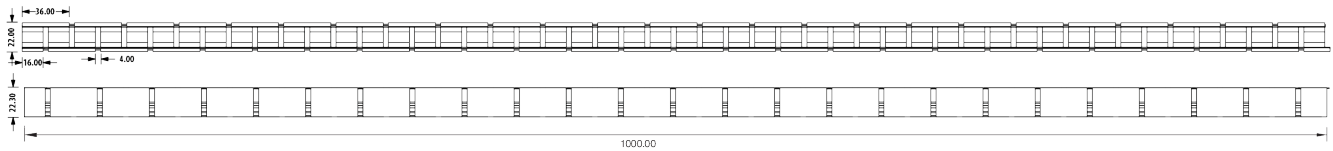


Model	W x H(mm)	Standard Length
TPR-KFLDV-PC-MTF	22.00*22.30	1000mm


2. Aluminum Flexible Mounting Track with Wire Way



Installation



Surface Mounted

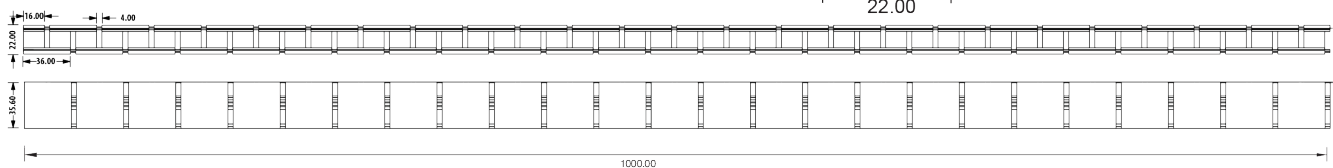


Model	W x H(mm)	Standard Length
TPR-KFLDV-PC-MTFWW	22.00*35.60	1000mm


TPR KurveFlex™ DV DMX Pixel Chasing RGBW 3D Bend Direct View

Mounting Options

Mounting Clip

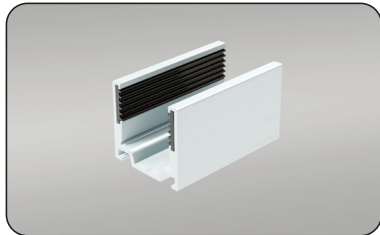

TPR-KFLDV-MC




Dimensions
Unit: mm

Angle Adjustable Bracket




TPR-KFLDV-AB

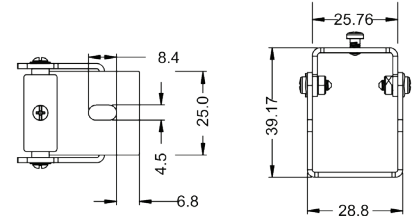


Dimensions
Unit: mm


Feed Options: Molded Injection Connectors (IP68 Factory Assembly Only)

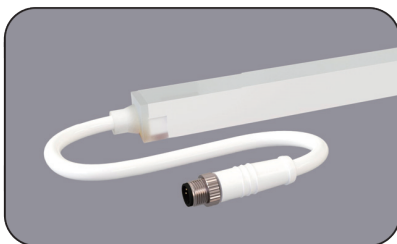



Direct Entry Connector
TPR-KFLDV-PC-EC

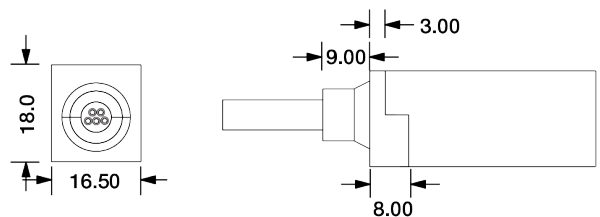


Side Entry Connector
TPR-KFLDV-PC-SC

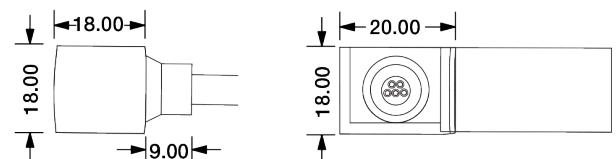

Bottom Entry Connector
TPR-KFLDV-PC-BC

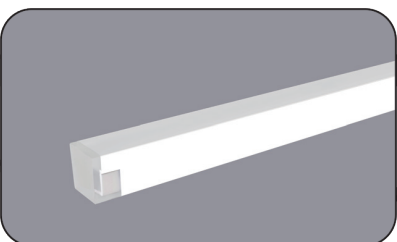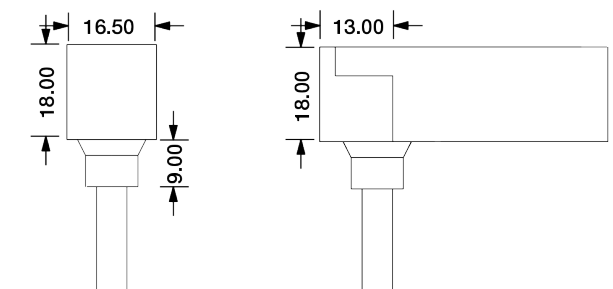


End Cap
TPR-KFLDV-PC-ECAP


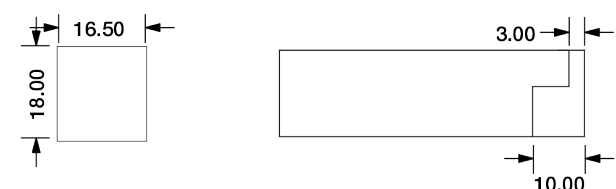


TPR KurveFlex™ DV DMX Pixel Chasing RGBW 3D Bend Direct View



Molded Injection Connectors & End Caps

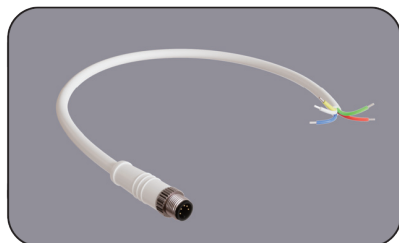


Male Connector
TPR-KFLDV-PC-MC

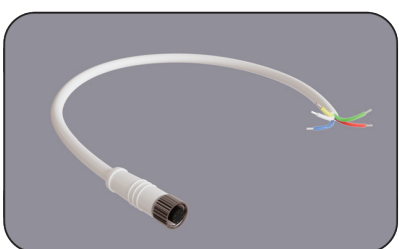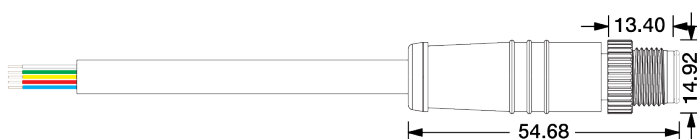


Female Connector
TPR-KFLDV-PC-FC

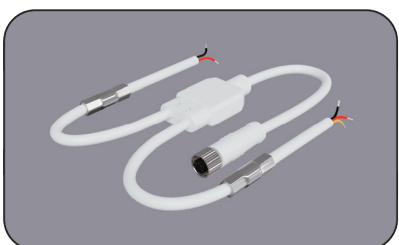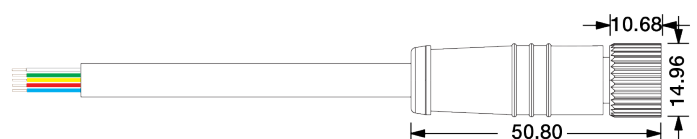


Front Signal & Power Connector
TPR-KFLDV-PC-FSPC

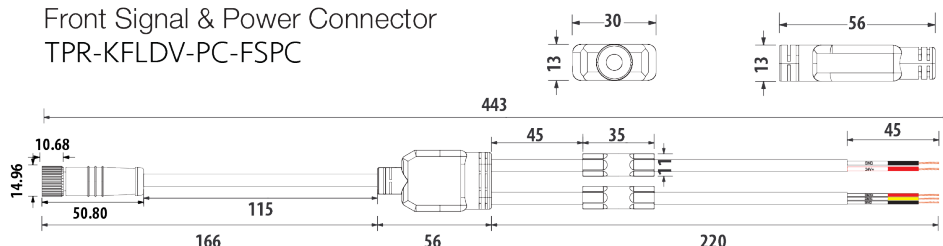

Male Connector End Cap
TPR-KFLDV-PC-MCEC



Female Connector End Cap
TPR-KFLDV-PC-FCEC



TPR KurveFlex™ DV DMX Pixel Chasing RGBW 3D Bend Direct View

KurveFlex DV Chasing RGBW DMX Configuration

