

TPR ILLUZION™ SINGLE COLOR WHITE LINEAR V2

IP66



Description:

The **TPR White Illuzion™ Linear** fixture is a low profile extruded Aluminum fixture for Architectural and Entertainment markets. It is line Voltage 120/277VAC input, and is available in five beam angles. It is supplied with swivel foot mount brackets for 150 degree aiming and is available in 1', 2' and 4' lengths.



Specifications:

Construction:	Aluminum Housing, Tempered Glass Lens
Lumen Output:	4' fixture (in 3000K White with a 15 x 55° beam) = 5878 lumens
Beam Angles:	10°, 20°, 30°, 40°, 60°, 15 x 55°, 15 x 40°
Operating Temp:	-4F to 104F (-20C to 40C)
Dimensions:	2.5" W x 4" H (on feet) x 48" L
Power:	65 Watts Max. (4')
LEDs:	Cree XPG
Voltage:	120-277VAC
Rating:	IP66
Control:	DMX/RDM, or 0-10
Certifications:	ETL, CE, ROHS

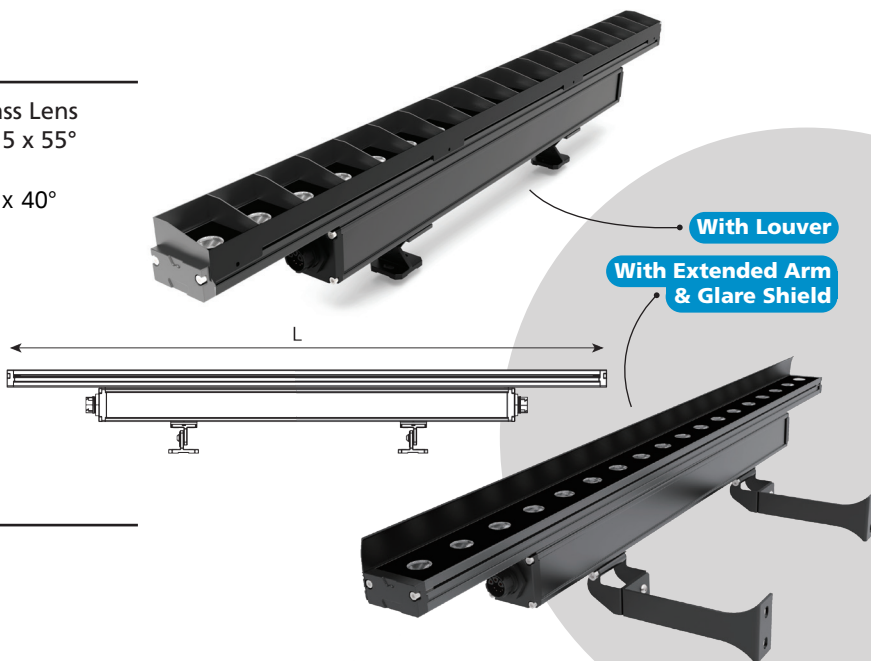

Accessories:

Part #	Jumper Power + Data
ILLV2JUMP1.5	1.5Ft. Cable IP65-IP65
ILLV2JUMP3	3Ft. Cable IP65-IP65
ILLV2JUMP6	6Ft. Cable IP65-IP65
ILLV2JUMP10	10Ft. Cable IP65-IP65
Part #	Power + Data Feed Cable
ILLV2PWR10	10Ft. Cable IP65-Bare Ends



Ordering Logic:

MODEL	LENGTH (in feet)	COLOR TEMP	BEAM ANGLE	OPTIONS	CONTROL
TPR-ILL-V2	1' 2' 4'	2700K 3000K 4000K	10°, 20° 30°, 40° 60° 15 x 55° 15 x 40°	LV (Louver) SH (Glare Shield) EXA (Extended Arm) - 6" 12" 18"	DMX/RDM 0-10