


TPR WESTFLEX COVEMAX X SLIM

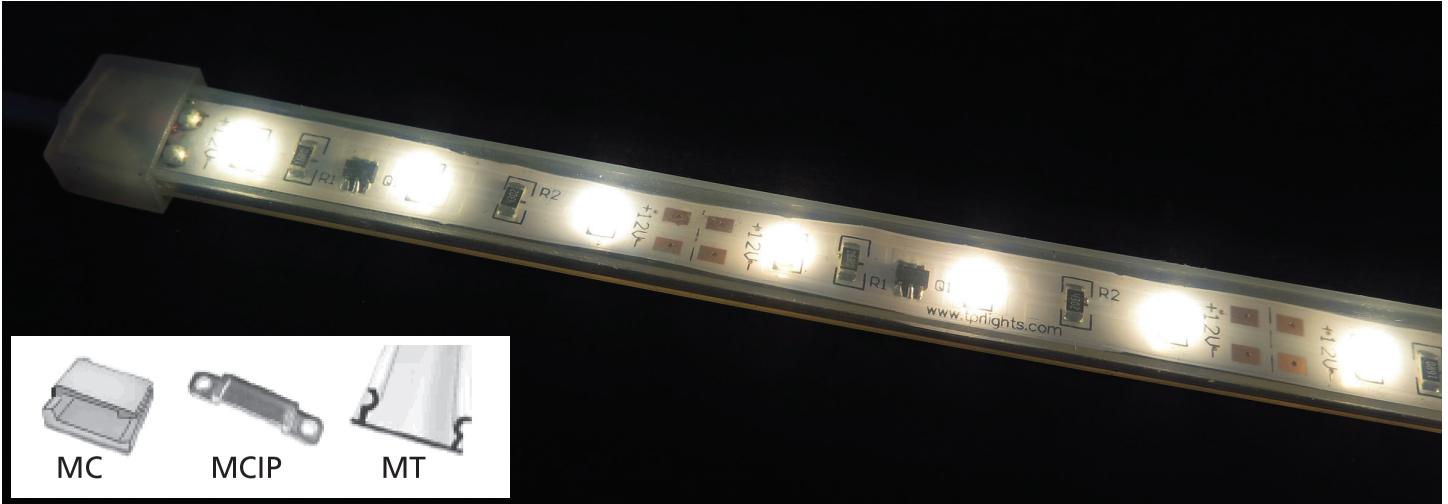

FL-SMD-CMX-S-WP

Description:

The **Covemax X Slim** is a flexible 12VDC tape light for Architectural or Entertainment use. It is available in Non-Protected, Indoor Protected and IP67 rated Outdoor Protection jackets. Westflex Covemax X Slim is cuttable every 2". There are a range of mounting options available. Covemax X Slim is available in three standard color temperatures. This is an extremely versatile product that is usable in a multitude of applications.

Specifications:

- | | | |
|--|--|---|
| <ul style="list-style-type: none"> • 2 Watts per linear foot • 20' max run length with feeds from both ends • 70% Light Maintenance @ 50,000hrs • Dimmable | <ul style="list-style-type: none"> • Viewing Angle 120 degrees • Available in IP67 • 18 Nichia LED's per foot • Max Lead Length 35' with #20AWG • 8mm Width | <p>LUMEN INFORMATION:</p> <ul style="list-style-type: none"> 2700K – 167lm/ft 3500K – 182lm/ft 4500K – 194lm/ft |
|--|--|---|

Certifications:



Ordering Logic:

MODEL	COLOR	RATING	MOUNTING	LEAD
FL-SMD-CMX-S	2700 3500 4500	NP (No Protection) IP (Indoor Protection) WP (IP67)	MC (Adhesive Clip) MCIP (Screw Clip)	T0 (Field Soldered lead) TC (19.5" Clip-on lead) T1 (12" Factory Installed lead) T_ (Factory lead, specify length)

Specifications are subject to change without notice.