

TPR ENCORE VERTICAL-BEND LED NEON

IP67

Description:

The **TPR Encore Vertical Bend LED Neon** is a flexible Neon replacement product for use in Architectural and Entertainment venues. It's available in several color temperatures of white, solid colors, RGB, and RGBW. It's IP67 rated, has UV protection, and allows for a tight bend radius. Great for outlining buildings and creating curved lines of light.



Specifications:

Construction: Silicone

Power: 4.9W/FT (Single color), 4.6W/FT (RGB),

4.6W/FT (RGBW)

Operating Voltage: 24VDC

Operating Temp: -4F to 104F (-20C to 40C)

Min Bend Radius: 7.9"


Lamp Life: 50,000hr (70% Lumen Maintenance)
Max Run Length: 39' Single Fed (Single Color only)
Max Run Length: 32' Single Fed (RGB & RGBW only)

Connectors: Molded (IP67)

Cut Length: 2" (50mm) White Light


3.25" (83.3mm) RGB & RGBW

Aluminum Mounting Track (Rigid)

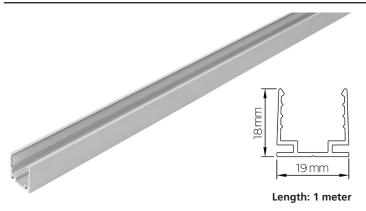


Aluminum Mounting Clip





Aluminum Mounting Track (Flexible)

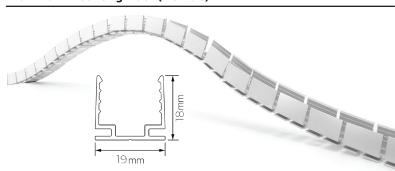




TPR ENCORE VERTICAL-BEND LED NEON CONTINUED

IP67

End Cap



EF – End Feed




BF – Bottom Feed



 ${f SF}$ - (Right or Left) Side Feed



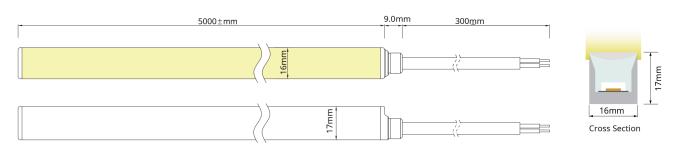

Certifications:







Ordering Logic:

MODEL						COLOR OR	COLOR TEMP	•	FEED TYPE
TPR-FL-ENCORE	-	S	-	VB	-	W (Choose CT) R (Red) G (Green) B (Blue) P (Pink) RGB RGBW	2100K 2400K 2700K 3000K 3500K 4000K 5000K 6500K	-	EF (end feed) BF (bottom feed) SF-L/R (side feed left or right)