

TPR WESTFLEX® 4-IN1 RGBW TAPELIGHT V2

IP20/67

Description:

The **Westflex® 4-in1 RGBW V2 Tapelight** is designed for Architectural and Entertainment markets. It is flexible, cuts to length every 1.96" and uses a high brightness 5050 LED for maximum performance. It is available in indoor or outdoor (IP67 jackets), and is fully controllable via DMX512 when used in conjunction with the WestPower 300-4 DC Dimmer. The White quadrants of the LED chip are available in 2700K, 3000K, 4000K, and 6000K white




Specifications:

Lumens: 475 lm/ft (at full RGBW)
Power: 7.4 W/ft
Operating Voltage: 24VDC
Operating Temp: -4F to 104F (-20C to 40C)
Dimensions: 0.5"W x 0.2H

Max Run: 16.4' on Single Power Feed
Lamp Life: 50,000hrs @70% lumen maintenance
Max Lead: 35' with AWG18
Viewing Angle: 120 degrees
Cut Length: 3.937" (100mm)

Certifications:

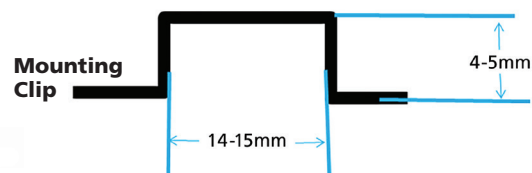

Ordering Logic:

MODEL					PROTECTION (P) RATING
TPR-FL-SMD	-	RGBW4V2	-	2700K 3000K 4000K 6500K	NP (no jacket) IP (indoor protected) WP (weather protected)